


Guide post 02

Guide post form A with lubrication grooves according to VDI 3356

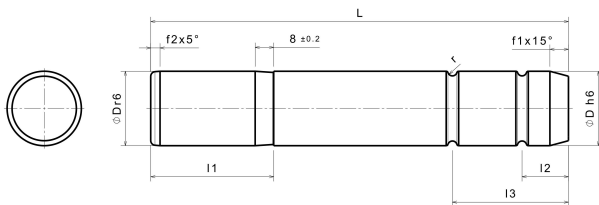

Product description:

Guide post form A with lubrication grooves according to VDI 3356

Article properties:

Base Material	Steel, hardened
Hardening depth	1 + 0,5 mm
Hardness	58 ± 2 HRC

Variants:

Articlenumber	Article name	Outer diameter D	Length L	l1	l2	l3	f1	f2	r
82216125	02 16-125	16	125	36	8	21	2	3	2
82220125	02 20-125	20	125	40	10	26	4	3	2
82220140	02 20-140	20	140	40	10	26	4	3	2
82225125	02 25-125	25	125	45	13	33	4	3	2
82225140	02 25-140	25	140	45	13	33	4	3	2
82225160	02 25-160	25	160	45	13	33	4	3	2
82225180	02 25-180	25	180	45	13	33	4	3	2
82225200	02 25-200	25	200	45	13	33	4	3	2
82230180	02 32-180	32	180	45	20	50	8	4	2
82232125	02 32-125	32	125	45	20	50	8	4	2
82232250	02-32-250	32	250	45	20	50	8	4	2
82232140	02 32-140	32	140	45	20	50	8	4	2
82232160	02 32-160	32	160	45	20	50	8	4	2
82232180	02 32-180	32	180	45	20	50	8	4	2
82232200	02 32-200	32	200	45	20	50	8	4	2
82232240	02 32-224	32	224	45	20	50	8	4	2
82232600	02 32-260	32	260	45	20	50	8	4	2
82240130	02 40-130	40	130	56	20	50	8	4	2
82240140	02 40-140	40	140	56	20	50	8	4	2
82240160	02 40-160	40	160	56	20	50	8	4	2
82240180	02 40-180	40	180	56	20	50	8	4	2
82240200	02 40-200	40	200	56	20	50	8	4	2
82240224	02 40-224	40	224	56	20	50	8	4	2
82240250	02 40-250	40	250	56	20	50	8	4	2
82240280	02 40-280	40	280	70	20	50	8	4	2
82250160	02 50-160	50	160	70	25	65	10	4	2,5
82250180	02 50-180	50	180	70	25	65	10	4	2,5

Guide post 02

Guide post form A with lubrication grooves according to VDI 3356



Articlenumber	Article name	Outer diameter D	Length L	l1	l2	l3	f1	f2	r
82250200	02 50-200	50	200	70	25	65	10	4	2,5
82250224	02 50-224	50	224	70	25	65	10	4	2,5
82250250	02 50-250	50	250	70	25	65	10	4	2,5
82250280	02 50-280	50	280	70	25	65	10	4	2,5
82250315	02 50-315	50	315	70	25	65	10	4	2,5
82250355	02 50-355	50	355	70	25	65	10	4	2,5
82263160	02 63-160	63	160	80	32	65	10	4	2,5
82263180	02 63-180	63	180	80	32	65	10	4	2,5
82263200	02 63-200	63	200	80	32	65	10	4	2,5
82263224	02 63-224	63	224	80	32	65	10	4	2,5
82263250	02 63-250	63	250	80	32	72	10	4	2,5
82263280	02 63-280	63	280	80	32	72	10	4	2,5
82263315	02 63-315	63	315	80	32	72	10	4	2,5
82263355	02 63-355	63	355	80	32	72	10	4	2,5
82263400	02 63-400	63	400	80	32	72	10	4	2,5
82280180	02 80-180	80	180	100	40	85	12	4	3
82280200	02 80-200	80	200	100	40	85	12	4	3
82280220	02 80-220	80	220	100	40	85	12	4	3
82280240	02 80-240	80	240	100	40	85	12	4	3
82280250	02 80-250	80	250	100	40	85	12	4	3
82280260	02 80-260	80	260	100	40	85	12	4	3
82280280	02 80-280	80	280	100	40	85	12	4	3
82280300	02 80-300	80	300	100	40	85	12	4	3
82280315	02 80-315	80	315	100	40	85	12	4	3
82280350	02 80-350	80	350	100	40	85	12	4	3
82280355	02 80-355	80	355	100	40	85	12	4	3
82280360	02 80-360	80	360	100	40	85	12	4	3
82280400	02 80-400	80	400	100	40	85	12	4	3
82280500	02 80-500	80	500	100	40	85	12	4	3
82300290	02 100-290	100	290	125	52	100	14	4	3,5
82310180	02 100-180	100	180	125	52	100	14	4	3,5
82310200	02 100-200	100	200	125	52	100	14	4	3,5
82310220	02 100-220	100	220	125	52	100	14	4	3,5
82310240	02 100-240	100	240	125	52	100	14	4	3,5
82310260	02 100-260	100	260	125	52	100	14	4	3,5
82310280	02 100-280	100	280	125	52	100	14	4	3,5
82310300	02 100-300	100	300	125	52	100	14	4	3,5
82310315	02 100-315	100	315	125	52	100	14	4	3,5
82310350	02 100-350	100	350	125	52	100	14	4	3,5
82310355	02 100-355	100	355	125	52	100	14	4	3,5
82310400	02 100-400	100	400	125	52	100	14	4	3,5
82310500	02 100-500	100	500	125	52	100	14	4	3,5