
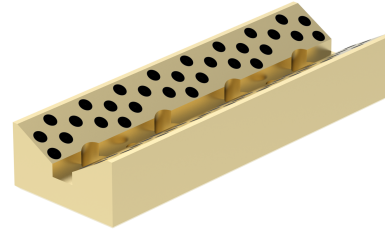


CBS

Guide prism, self lubricating

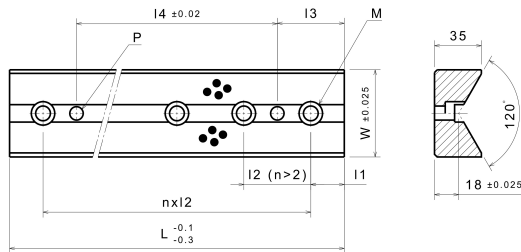

Product description:

Guide prism, self lubricating

Article properties:

Sliding speed v	30 m/min
Base Material	Special Brass (SO#50SP2)
Self-lubricating	Yes
Lubricant	Graphite
Surface Pressure P	100 N/mm ²
P*v-value	200 N/mm ² x m/min
Operating temperature	-50°C / +200°C (max. 300°C)
Friction coefficient	0,07

Variants:

Articlenumber	Article name	Width W	Length L	Height H	I1	I2	I3	I4	M (ISO 4762)	P (ISO 8734)	Counterpart
23035075	CBS 35-75	35	75	24	15	45	30	15	2xM8	2xø8	CBSP 35-75
23032410	CBS 35-100	35	100	24	20	60	40	20	2xM8	2xø8	CBSP 35-100
23052412	CBS 35-125	35	125	24	20	85	40	45	2xM8	2xø8	CBSP 35-125
23052415	CBS 35-150	35	150	24	20	110	40	70	2xM8	2xø8	CBSP 35-150
23053107	CBS 50-75	50	75	31	15	45	30	15	2xM10	2xø10	CBSP 50-75
23053110	CBS 50-100	50	100	31	20	60	40	20	2xM10	2xø10	CBSP 50-100
23053112	CBS 50-125	50	125	31	25	75	50	25	2xM10	2xø10	CBSP 50-125
23053115	CBS 50-150	50	150	31	25	100	50	50	2xM10	2xø10	CBSP 50-150
23064710	CBS 65-100	65	100	35	20	60	40	20	2xM10	2xø10	CBSP 65-100
23064715	CBS 65-150	65	150	35	25	50	50	50	3xM10	2xø10	CBSP 65-150
23064720	CBS 65-200	65	200	35	25	50	50	100	4xM10	2xø10	CBSP 65-200
23064725	CBS 65-250	65	250	35	25	50	50	150	5xM10	2xø10	CBSP 65-250
23064730	CBS 65-300	65	300	35	25	50	50	200	6xM10	2xø10	CBSP 65-300