
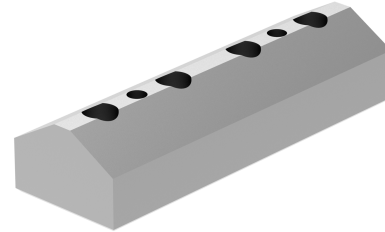


CBSP

Guide prism, hardened steel

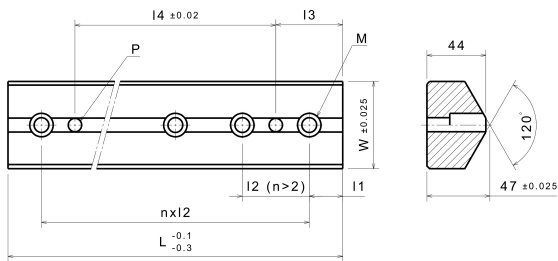

Product description:

Guide prism, hardened steel

Article properties:

Base Material	Steel, hardened
Sliding speed v	10 m/min
Self-lubricating	No
Surface Pressure P	30 N/mm ²
P*v-value	60 N/mm ² x m/min
Operating temperature	-50°C / +200°C

Variants:

Articlenumber	Article name	Width W	Length L	Height H	I1	I2	I3	I4	M (ISO 4762)	P (ISO 8734)	Counterpart
23064307	CBSP 35-75	35	75	17	15	45	30	15	2xM8	2xø8	CBS 65-100
23032010	CBSP 35-100	35	100	17	20	60	40	20	2xM8	2xø8	CBS 65-150
23032012	CBSP 35-125	35	125	17	20	85	40	45	2xM8	2xø8	CBS 65-200
23032015	CBSP 35-150	35	150	17	20	110	40	70	2xM8	2xø8	CBS 65-250
23053207	CBSP 50-75	50	75	29	15	45	30	15	2xM10	2xø10	CBS 65-300
23053210	CBSP 50-100	50	100	29	20	60	40	20	2xM10	2xø10	CBS 65-100
23053212	CBSP 50-125	50	125	29	25	75	50	25	2xM10	2xø10	CBS 65-150
23053215	CBSP 50-150	50	150	29	25	100	50	50	2xM10	2xø10	CBS 65-200
23063510	CBSP 65-100	65	100	44	20	60	40	20	2xM10	2xø10	CBS 65-100
23063515	CBSP 65-150	65	150	44	25	50	50	50	3xM10	2xø10	CBS 65-150
23063520	CBSP 65-200	65	200	44	25	50	50	100	4xM10	2xø10	CBS 65-200
23063525	CBSP 65-250	65	250	44	25	50	50	150	5xM10	2xø10	CBS 65-250
23063530	CBSP 65-300	65	300	44	25	50	50	200	6xM10	2xø10	CBS 65-300