


# SOBC

Flanged bush, red brass with solid lubricant

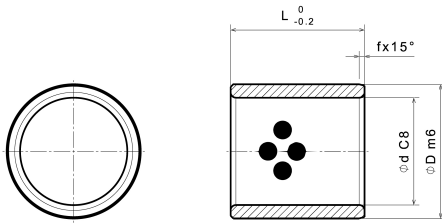

## Product description:

Flanged bush, red brass with solid lubricant

## Article properties:

Base Material	Custom Bronze (SO#50B)
Self-lubricating	Yes
Lubricant	Graphite
Surface Pressure P	50 N/mm <sup>2</sup>
Sliding speed v	50 m/min
P*v-value	100 N/mm <sup>2</sup> x m/min
Operating temperature	-50°C / +200°C (max. 400°C)
Friction coefficient	0,15

## Variants:

Articlenumber	Article name	Inner diameter d	Outer diameter D	Length L	f
119020001	SOBC 20-30-20	20	30	20	0,5
119020002	SOBC 20-30-25	20	30	25	0,5
119020003	SOBC 20-30-30	20	30	30	0,5
119025504	SOBC 25-35-20	25	35	20	0,5
119025505	SOBC 25-35-30	25	35	30	0,5
119025506	SOBC 25-35-40	25	35	40	0,5
119030007	SOBC 30-40-25	30	40	25	0,5
119030008	SOBC 30-40-30	30	40	30	0,5
119030009	SOBC 30-40-40	30	40	40	0,5
119030210	SOBC 30-42-25	30	42	25	0,5
119030211	SOBC 30-42-30	30	42	30	0,5
1190302111	SOBC 30-42-40	30	42	40	0,5
119032213	SOBC 32-42-30	32	42	30	0,5
119032214	SOBC 32-42-40	32	42	40	0,5
119032515	SOBC 32-45-30	32	45	30	0,5
119032516	SOBC 32-45-40	32	45	40	0,5
119035517	SOBC 35-45-30	35	45	30	0,5
119035518	SOBC 35-45-40	35	45	40	0,5
119035519	SOBC 35-45-50	35	45	50	0,5
119035820	SOBC 35-48-30	35	48	30	0,5
119035821	SOBC 35-48-40	35	48	40	0,5

# SOBC

Flanged bush, red brass with solid lubricant



Articlenumber	Article name	Inner diameter d	Outer diameter D	Length L	f
119035822	SOBC 35-48-50	35	48	50	0,5
119040023	SOBC 40-50-30	40	50	30	0,5
119040024	SOBC 40-50-40	40	50	40	0,5
119040025	SOBC 40-50-50	40	50	50	0,5
119040526	SOBC 40-55-30	40	55	30	0,5
119040527	SOBC 40-55-40	40	55	40	0,5
119040528	SOBC 40-55-50	40	55	50	0,5
119045529	SOBC 45-55-40	45	55	40	0,5
119045530	SOBC 45-55-50	45	55	50	0,5
119045031	SOBC 45-60-40	45	60	40	0,5
119045032	SOBC 45-60-50	45	60	50	0,5
119050033	SOBC 50-60-40	50	60	40	1
119050034	SOBC 50-60-50	50	60	50	1
119050035	SOBC 50-60-60	50	60	60	1
119050536	SOBC 50-65-40	50	65	40	1
119050537	SOBC 50-65-50	50	65	50	1
119050538	SOBC 50-65-60	50	65	60	1
119055039	SOBC 55-70-50	55	70	50	1
119055040	SOBC 55-70-60	55	70	60	1
119060541	SOBC 60-75-50	60	75	50	1
119060542	SOBC 60-75-60	60	75	60	1
119060543	SOBC 60-75-80	60	75	80	1
119060644	SOBC 60-80-50	60	80	50	1
119060645	SOBC 60-80-60	60	80	60	1
119060646	SOBC 60-80-80	60	80	80	1
119065047	SOBC 65-80-60	65	80	60	1
119065048	SOBC 65-80-80	65	80	80	1
119065549	SOBC 65-85-60	65	85	60	1
119065550	SOBC 65-85-80	65	85	80	1
119070551	SOBC 70-85-60	70	85	60	1
119070552	SOBC 70-85-80	70	85	80	1
119070653	SOBC 70-90-60	70	90	60	1
119070654	SOBC 70-90-80	70	90	80	1
119075055	SOBC 75-90-60	75	90	60	1
119075056	SOBC 75-90-80	75	90	80	1
119075557	SOBC 75-95-60	75	95	60	1
119075558	SOBC 75-95-80	75	95	80	1
119080559	SOBC 80-95-80	80	95	80	1
119080560	SOBC 80-95-100	80	95	100	1
119080661	SOBC 80-100-80	80	100	80	1
119080662	SOBC 80-100-100	80	100	100	1
119085063	SOBC 85-100-80	85	100	80	1
119085064	SOBC 85-100-100	85	100	100	1
119085565	SOBC 85-105-80	85	105	80	1
119085566	SOBC 85-105-100	85	105	100	1
119090067	SOBC 90-110-80	90	110	80	1
119090068	SOBC 90-110-100	90	110	100	1

## SOBC

Flanged bush, red brass with solid lubricant



Articlenumber	Article name	Inner diameter d	Outer diameter D	Length L	f
119090569	SOBC 90-115-80	90	115	80	1
119090570	SOBC 90-115-100	90	115	100	1
119100071	SOBC 100-120-80	100	120	80	1
119100072	SOBC 100-120-100	100	120	100	1
119100073	SOBC 100-120-120	100	120	120	1
119100574	SOBC 100-125-80	100	125	80	1
119100575	SOBC 100-125-100	100	125	100	1
119100576	SOBC 100-125-20	100	125	20	1