


SOBFU

Maintenance free flanged bush, thin walled, bronze with solid lubricant Highly wear- and dirt-resistant, insertable at high temperature

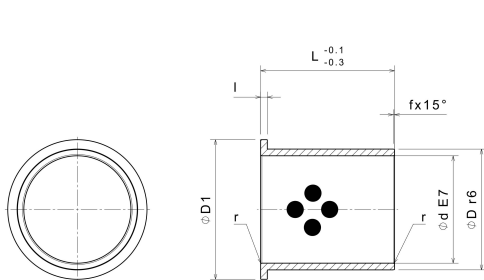

Product description:

Maintenance free flanged bush, thin walled, bronze with solid lubricant

Highly wear- and dirt-resistant, insertable at high temperature

Article properties:

| | |
|-----------------------|-------------------------------|
| Base Material | Special Brass (SO#50SP2) |
| Self-lubricating | Yes |
| Lubricant | Graphite |
| Surface Pressure P | 100 N/mm ² |
| Sliding speed v | 30 m/min |
| P*v-value | 200 N/mm ² x m/min |
| Operating temperature | -50°C / +200°C (max. 300°C) |
| Friction coefficient | 0,07 |

Variants:

| Articlenumber | Article name | Inner diameter d | Outer diameter D | Length L | D1 | l | f |
|---------------|----------------|------------------|------------------|----------|----|-----|-----|
| 1180051710 | SOBFU 05-07-10 | 5 | 7 | 10 | 11 | 1 | 0,5 |
| 1180051712 | SOBFU 05-07-12 | 5 | 7 | 12 | 11 | 1 | 0,5 |
| 1180060810 | SOBFU 06-08-10 | 6 | 8 | 10 | 12 | 1 | 0,5 |
| 1180060812 | SOBFU 06-08-12 | 6 | 8 | 12 | 12 | 1 | 0,5 |
| 1180060815 | SOBFU 06-08-15 | 6 | 8 | 15 | 12 | 1 | 0,5 |
| 1180081010 | SOBFU 08-10-10 | 8 | 10 | 10 | 14 | 1 | 0,5 |
| 1180081012 | SOBFU 08-10-12 | 8 | 10 | 12 | 14 | 1 | 0,5 |
| 1180081015 | SOBFU 08-10-15 | 8 | 10 | 15 | 14 | 1 | 0,5 |
| 1180081020 | SOBFU 08-10-20 | 8 | 10 | 20 | 14 | 1 | 0,5 |
| 1180101210 | SOBFU 10-12-10 | 10 | 12 | 10 | 16 | 1 | 0,5 |
| 1180101212 | SOBFU 10-12-12 | 10 | 12 | 12 | 16 | 1 | 0,5 |
| 1180101215 | SOBFU 10-12-15 | 10 | 12 | 15 | 16 | 1 | 0,5 |
| 1180101220 | SOBFU 10-12-20 | 10 | 12 | 20 | 16 | 1 | 0,5 |
| 1180121510 | SOBFU 12-15-10 | 12 | 15 | 10 | 21 | 1,5 | 0,5 |
| 1180121512 | SOBFU 12-15-12 | 12 | 15 | 12 | 21 | 1,5 | 0,5 |
| 1180121515 | SOBFU 12-15-15 | 12 | 15 | 15 | 21 | 1,5 | 0,5 |
| 1180121520 | SOBFU 12-15-20 | 12 | 15 | 20 | 21 | 1,5 | 0,5 |
| 1180121525 | SOBFU 12-15-25 | 12 | 15 | 25 | 21 | 1,5 | 0,5 |
| 1180121530 | SOBFU 12-15-30 | 12 | 15 | 30 | 21 | 1,5 | 0,5 |
| 1180131612 | SOBFU 13-16-12 | 13 | 16 | 12 | 22 | 1,5 | 0,5 |
| 1180131615 | SOBFU 13-16-15 | 13 | 16 | 15 | 22 | 1,5 | 0,5 |

SOBFU

Maintenance free flanged bush, thin walled, bronze with solid lubricant Highly wear- and dirt-resistant, insertable at high temperature



| Articlenumber | Article name | Inner diameter d | Outer diameter D | Length L | D1 | l | f |
|---------------|----------------|------------------|------------------|----------|----|-----|-----|
| 1180131620 | SOBFU 13-16-20 | 13 | 16 | 20 | 22 | 1,5 | 0,5 |
| 1180151810 | SOBFU 15-18-10 | 15 | 18 | 10 | 24 | 1,5 | 0,5 |
| 1180151812 | SOBFU 15-18-12 | 15 | 18 | 12 | 24 | 1,5 | 0,5 |
| 1180151815 | SOBFU 15-18-15 | 15 | 18 | 15 | 24 | 1,5 | 0,5 |
| 1180151820 | SOBFU 15-18-20 | 15 | 18 | 20 | 24 | 1,5 | 0,5 |
| 1180151825 | SOBFU 15-18-25 | 15 | 18 | 25 | 24 | 1,5 | 0,5 |
| 1180162012 | SOBFU 16-20-12 | 16 | 20 | 12 | 26 | 2 | 0,5 |
| 1180162015 | SOBFU 16-20-15 | 16 | 20 | 15 | 26 | 2 | 0,5 |
| 1180162020 | SOBFU 16-20-20 | 16 | 20 | 20 | 26 | 2 | 0,5 |
| 1180162025 | SOBFU 16-20-25 | 16 | 20 | 25 | 26 | 2 | 0,5 |
| 1180162030 | SOBFU 16-20-30 | 16 | 20 | 30 | 26 | 2 | 0,5 |
| 1180202415 | SOBFU 20-24-15 | 20 | 24 | 15 | 32 | 2 | 0,5 |
| 1180202420 | SOBFU 20-24-20 | 20 | 24 | 20 | 32 | 2 | 0,5 |
| 1180202425 | SOBFU 20-24-25 | 20 | 24 | 25 | 32 | 2 | 0,5 |
| 1180202430 | SOBFU 20-24-30 | 20 | 24 | 30 | 32 | 2 | 0,5 |
| 1180202440 | SOBFU 20-24-40 | 20 | 24 | 40 | 32 | 2 | 0,5 |
| 1180252930 | SOBFU 25-29-30 | 25 | 29 | 30 | 37 | 2 | 0,5 |
| 1180252940 | SOBFU 25-29-40 | 25 | 29 | 40 | 37 | 2 | 0,5 |
| 1180252950 | SOBFU 25-29-50 | 25 | 29 | 50 | 37 | 2 | 0,5 |
| 1180303430 | SOBFU 30-34-30 | 30 | 34 | 30 | 42 | 2 | 0,5 |
| 1180303440 | SOBFU 30-34-40 | 30 | 34 | 40 | 42 | 2 | 0,5 |
| 1180303450 | SOBFU 30-34-50 | 30 | 34 | 50 | 42 | 2 | 0,5 |